


## Sewing Together Unit-BL and Unit-AR

The graphic on this page were built to reflect the front side view of your finished units. We included the seam allowance in the graphics around the perimeter of each unit so you could visually see where the units match at each intersection.

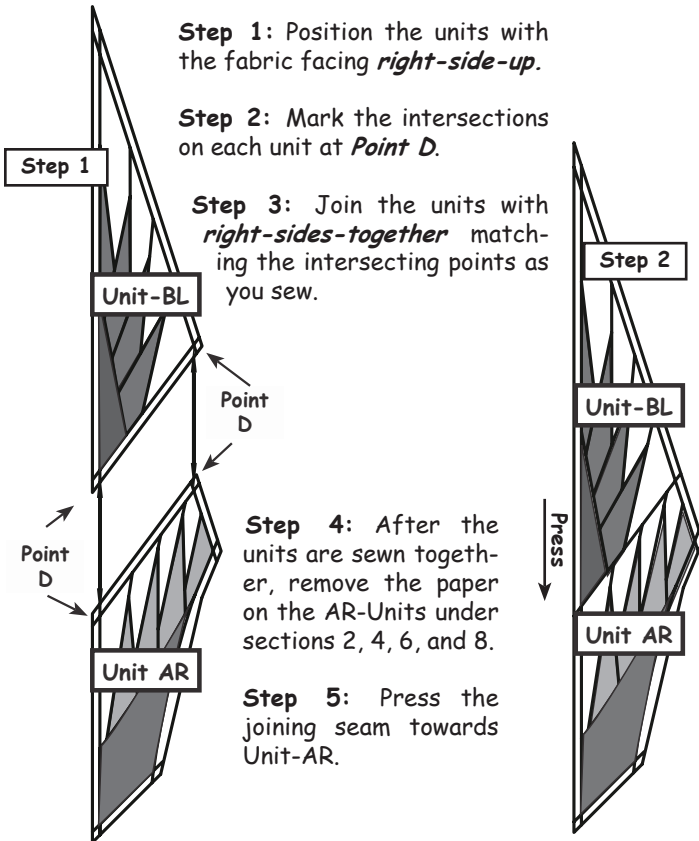


**Step 1:** Match and pin together the AR and AL Units at *Points A, B, and C*.

**Step 2:** Remove the foundation paper on the *backside of Unit-AL*.


**Step 3:** Use your glue pen and glue the raw edges of the joining seam.

**Step 4:** Starting at the edge of the fabric at *Point B*, sew the joining curved seam between *Point B* and *Point A*. When you reach *Point A*, leave the needle in the down position, lift the presser foot, straighten the fabric, lining it up with the edge of the presser foot. Note the last segment of the seam between *Point A* and *Point C* is a straight seam. Continue sewing off the end of the fabric just past *Point C*.

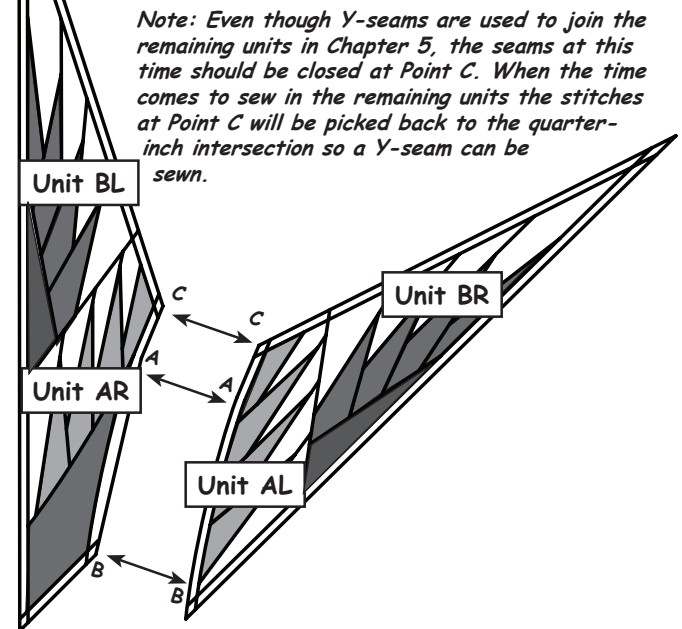


## Sewing Together Unit-BR and Unit-AL

The same previous steps are repeated for Unit-BR and Unit-AL.

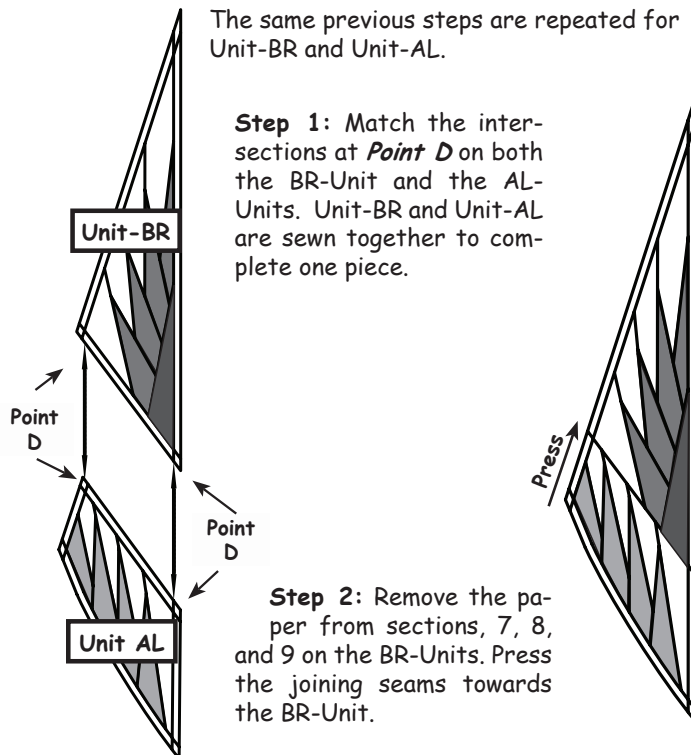

**Step 5:** Remove the paper under the AR-Unit.

**Step 6:** The joining seam between Unit-AL and Unit-AR is pressed towards the AR-Unit.

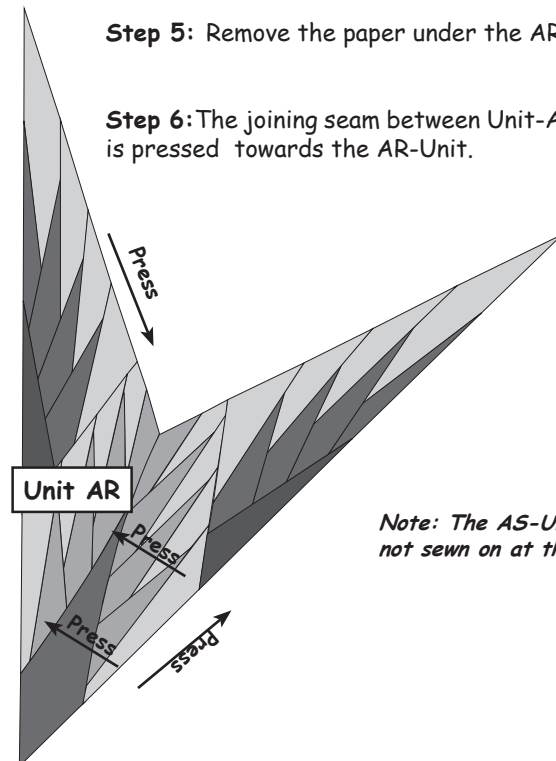

*Note: The AS-Units are not sewn on at this time.*