

Group Four:

Units-B/E/H/Z/K:
Group 1,



Units-U/S/P/M/I:
Group 3,

Units-T/R/O/L/G:
Group 2,

Group 1: to Group 2:

1: Place the pieces *right-sides-together* with **Group 1** on the top. Starting with the (A3) registration point, match and pin the units along the stitch line.

2: Remove the foundation papers along the edge of the sew line on **Group 2** (shown above in Illustration 1) before you sew the seams together.

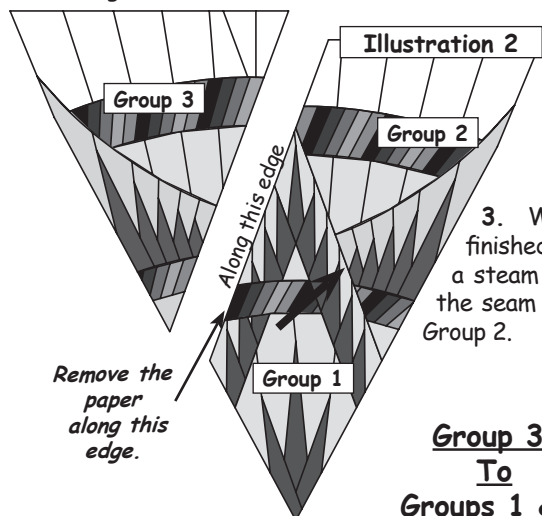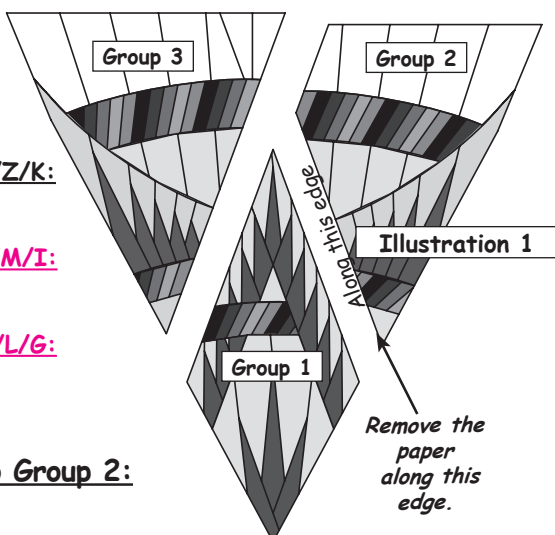

3. When you are finished sewing, use a steam iron and press the seam facing towards **Group 2**.


Group 3: To Groups 1 & 2:

1: Place the pieces *right-sides-together* with **Group 3** on the top. Starting with the (B3) registration point, match and pin the units along the stitch line.

Note: The joining seams on the rope are stacked seams. To prevent the seams from slipping as you sew over them a pin is placed on each side of the stitch line.

2: Remove the foundation paper under **Unit-Z/H/E**, glue the edges and sew the pieces together.


3: When you are finished sewing, remove the foundation paper from under the seam, press the seam facing towards **Group 1**.

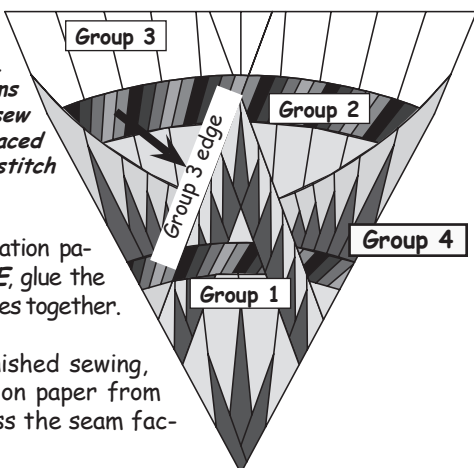

Group Five:

Units-C, D, A to Group 4,

1: **Unit-C** & **Unit-D** are sewn along both edges. Each unit is marked with (6) registration points. Since most of the fabric you will be sewing is all bias along the edge, it is a good idea to leave the paper attached to the units as well as the units within **Group 4**.

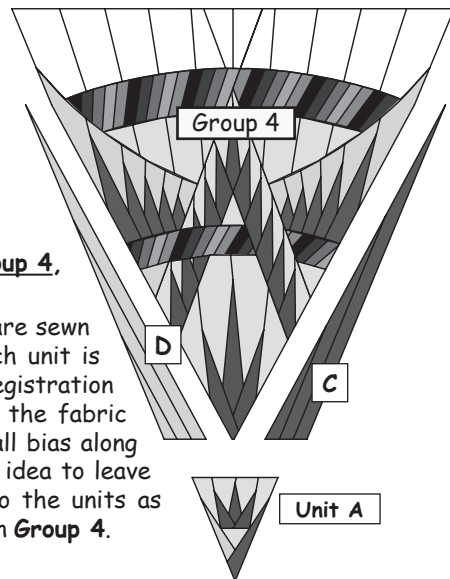

2: **Unit-D**, with *right-sides-together* place **Unit-D** on top of the pieces in **Group 4**. Starting at the (B1) registration point, match and pin each point. Use your glue pen to secure the edge. The **D-Unit** is very long and narrow, you will find it wants to slide sideways under the presser foot as you sew. Sewing slow along the edges of these two pieces results in a straight flat finished seam.

Note: Don't be alarmed how the long skinny point fits just past the end of the (B5) registration point. Once the seam is sewn and pressed the excess fabric is trimmed off.

3: When you are finished sewing, press the seam facing in towards **Group 4**. You will need to remove the foundation paper under the seam allowance as you press this seam.

4: Repeat the same process for **Unit-C**. The registration points are labeled (A1) through (A5), ending with (A1). After you remove the foundation paper under the seam allowance press the seam facing in towards **Unit-C**.

5: **Unit-A** is sewn onto the bottom of each group.

6: Remove the foundation paper from the backside of **Unit-A** on (4) pieces and press the seams in towards the **A-Unit**.

7: Remove the foundation paper under **Units-B/C/D** on the other four groups. **Optional:** Press the seams in opposing directions or towards **Units-B/C/D** is up to you, both ways will work.

