



When the foundation piecing is finished for each of the 32 units, the excess fabric is trimmed away from the edge of the foundation paper.


**Template A-L and A-R**

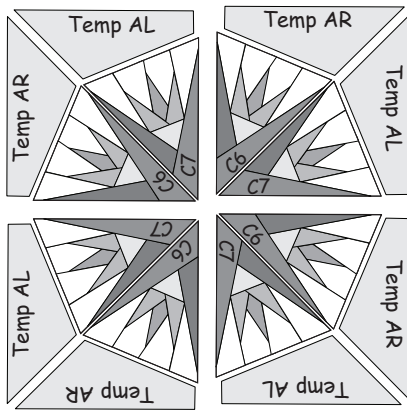


**Refer to Illustration 1 on page 7 prior to sewing your blocks:** The A Units are arranged by alternating the spikes cut from the C6 & C7 fabrics side by side. The AL & AR template pieces are sewn onto the ends of each A Unit to complete (4) squares.

Before you sew, mark the quarter-inch intersecting lines, shown on the paper templates, onto the backside of each AL & AR template piece.

The template pieces are matched and pinned onto each foundation unit then stitched to complete the pieces. After the pieces are sewn, the foundation paper is removed under sections 1 through 8 on Unit A.

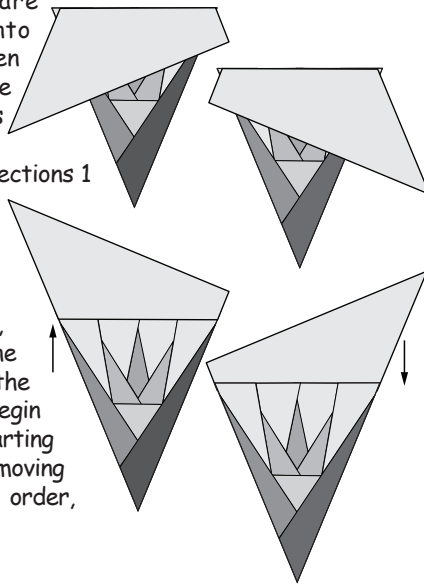

**Removing the Foundation Paper:** To remove, place your finger at the end of each seam. Pinch the fabric, seam, and paper. Begin tearing the paper off, starting with Sec. 8. Continue removing the paper in descending order, finishing with Sec 1.



**Piecing the Blocks**

**Refer to Illustration 1 on page 7 prior too sewing your blocks:**

It may be helpful to use Spray Starch PRIOR to sewing your pieces together to stabilize your pieces and improve your pressing results. This will minimize the stretching and slipping of your fabric pieces against each other as you sew the blocks together.


**Note:** Accurately sewn 1/4" seams are required to assemble the four squares.

**Step 1.** The left and right units are sewn together to complete four squares. The seams are pressed clockwise on the backside of the fabric.

**Step 2.** The squares are joined to complete four blocks.

**Step 3:** The stitches are picked back on each seam at the intersection where the seams join.

**Step 4:** The seams are twisted, allowing the fabric to lay flat, leaving you with a small star as shown to the right.



**Step 5:** Press the seams counterclockwise. The block size should measure about 15-3/4".

**Step 6:** The blocks are sewn together into one column to complete the center. The process for pressing your seams is repeated at each intersection where the seams join.

**Inner Accent Border, Accent Fabric C6**

The inner accent border is a strip of fabric which is folded in half, pressed, and sewn onto the table runner. A step by step reference diagram for sewing the accent inner folded border follows.

**Step 1:** Cut (6) 1-1/2" strips across the width of the fabric from Accent C6.

**Step 2:** Trim a 45 degree angle off one end on each of four strips, using the 45 degree markings on your rotary cutting ruler.


**Step 3:** Join the (4) strips, sewing the mitered ends together, to complete two long strips.

**Step 4:** Press the strip in half, lengthwise. (Steam is recommended to leave a nice crease down the center of the strip.)




**Step 5:** Measure the length of your existing table runner and cut two lengths to fit the exact measurement down both sides of the table runner.

**Step 6:** Open the strips and pin one raw edge of each strip, evenly, down each side.

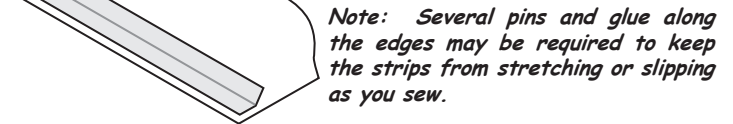


**Note:** Several pins and glue along the edges may be required to keep the strips from stretching or slipping as you sew.

**Step 7:** Open the strips and sew down the center of the folded creased line.



**Step 8:** Repress the strips, folded with all three raw edges matching along the edge of the table runner.



**Step 9:** Repeat the same process for both sides and the top and bottom pieces.