


6: Sew the E3-units onto the back-ground pieces. Press the seams in towards the background.

7: Sew the left C-Units onto the LS-Unit. After the seam is completed remove the remaining paper from the left C-Units. Press the seams in towards the C-Units.




8: Sew the right C-Units onto the LS-Unit. After the seam is completed remove the remaining paper from the right C-Units. Press the seams in towards the C-Units.

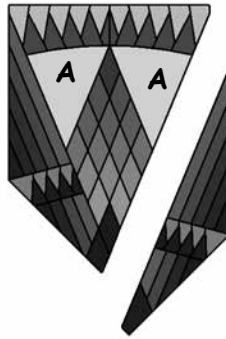


Set these pieces aside and move onto Part three.

4: Sew the E-2 units onto the B-Background pieces. Press the seams toward the background pieces.

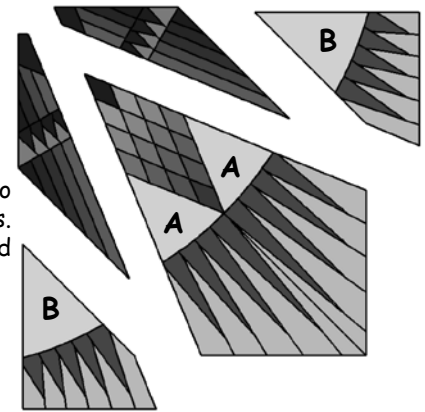

5: Sew the B-Background and E2 pieces onto the C1, C2, & C3 pieces.

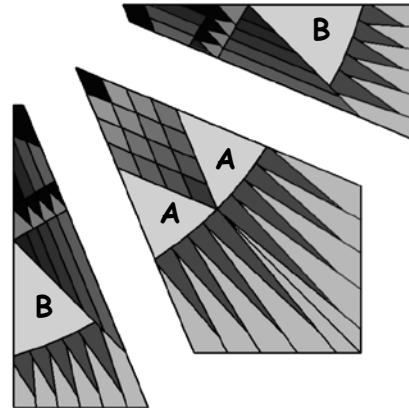


6: Press the seams toward the B-Background pieces.

7: Remove the foundation paper from the joining seam on the C1 and B pieces.

Finishing the Quilt, Part 3:

LS-6, C1-C2-C3, and Background Pieces A:

E-2, E-1, and Background Pieces B.

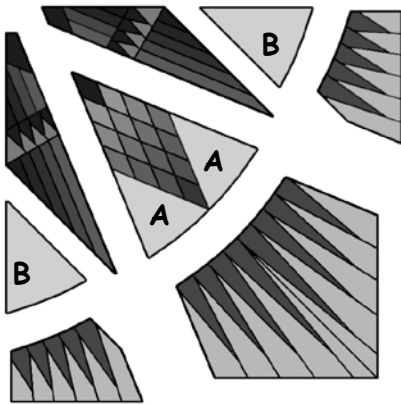


Follow the steps below to build four (4) large corner sets for Part 3.

1: Remove the foundation paper from the E2 and E1-units.

2: Sew the E1-units together to complete the corners. Press the seams open.

3: Sew the E-1 units onto the A-Background pieces. Press the seams in toward the background pieces.


Note: The process for the curved piecing is the same as described in the *Curved piecing section under 'General Tips for Finishing the Quilt' on page 21.

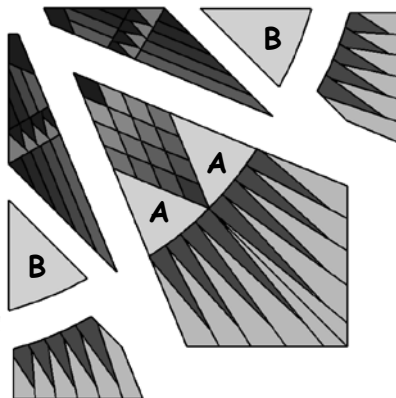

Note: Removing part of the foundation paper on the C1 and C2 units along the seam will make it easier to press the seams flat, but don't remove all the paper. The paper along the long edges of the C1 and C2-units will provide stability when you join longer seams together to complete the units.

8: Sew the seam between the C1, B, and E2 pieces onto the LS-6, A, and E1 pieces.

9: Remove the remaining foundation paper from the C1-unit.

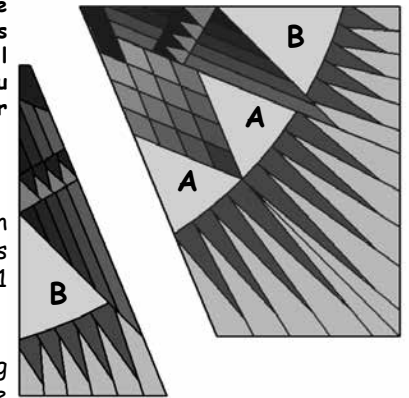

10: Press the seams in toward the C1 and E2-Units.

11: Repeat steps 8, 9 and 10 and sew the last piece on to complete the large corner sections.

12: Once the corners are completed, press the backside of all the pieces with steam and spray starch.

