


# FOUNDATION PAPER PIECING BAG: FOUNDATION SHEETS S1 TO S5

## ► Round 1: Strips 1-8

The graphic to the right is repeated from Page 7, Step 4. The strips in the first round are glued onto the backside of each


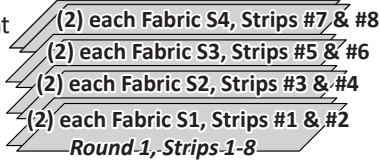


Foundation Sheets S2, S3, S4, & S5.

1. Pair Fabric S1, Strip #1, to Foundation Sheet S5, Sec 1
2. Pair Fabric S1, Strip #2, to Foundation Sheet S5, Sec 1
3. Pair Fabric S2, Strip #3 to Foundation Sheet S4, Sec 1
4. Pair Fabric S2, Strip #4 to Foundation Sheet S4, Sec 1
5. Pair Fabric S3, Strip #5 to Foundation Sheet S3, Sec 1
6. Pair Fabric S3, Strip #6 to Foundation Sheet S3, Sec 1
7. Pair Fabric S4, Strip #7 to Foundation Sheet S2, Sec 1
8. Pair Fabric S4, Strip #8 to Foundation Sheet S2, Sec 1

**Step 1:** Place Strip #1 [Fabric S1] *wrong-side-up* on your table along the edge of **Foundation Sheet S5** as shown. Find the diamonds on the foundation paper labeled as Sec. 1.


**Step 2:** Place a small amount of fabric glue on the backside of the paper under Sec. 1. Lift the foundation paper, slide the fabric under the Section 1 Diamonds and adhere the paper to *wrong-side* of the fabric. Repeat Step 1 for each **Foundation Sheet S5, S4, S3, and S2.**

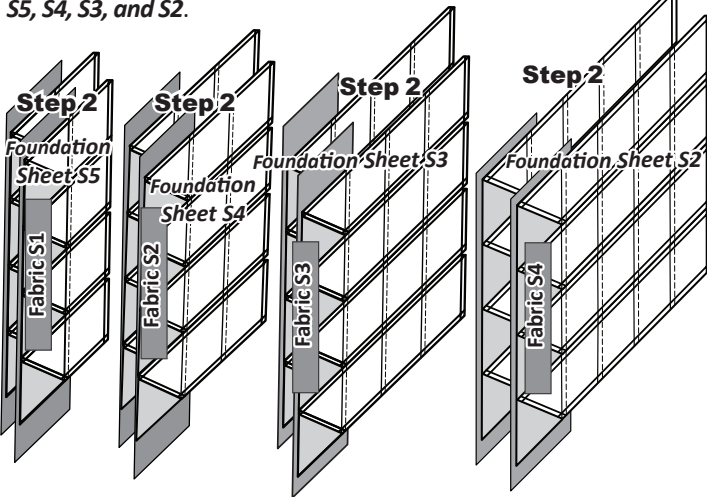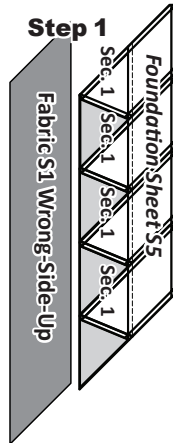

**Step 3:** Start with **Foundation Sheet S2**, place the fold template over the top of Sec. 1, lining the edge up on the solid black line marked Line 1.


**Step 4:** Fold the paper back over the top of the fold template.

**Step 5:** Place the **Add-A-Quarter** ruler next to the folded back paper lip-side down and trim

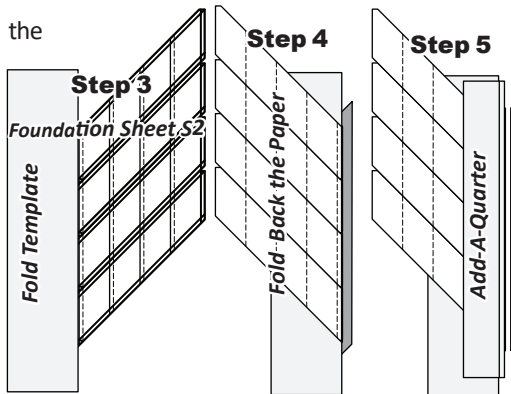

the fabric with your rotary cutter. This leaves you with a quarter-inch seam allowance which, is lined up with the next strip of fabric.

**Step 6:** Repeat the trimming process in the previous Steps 3-5 on each **Foundation Sheet S5, S4, S3, and S2.** Stack the papers as you trim starting with Paper #8 on the bottom, ending with Paper #1 on the top as shown on the right.

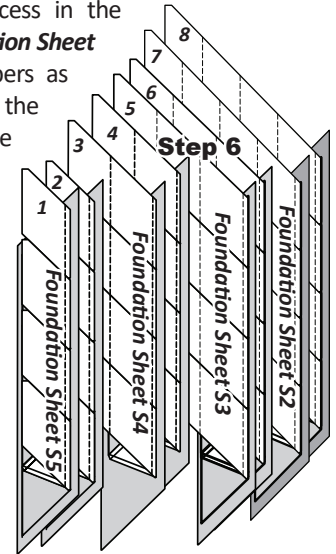

## ► Round 2: Strips 1-10

**Strips 1-8:** Round 2 strips 1-8 are positioned under the Sec. 2 diamond on each Foundation Sheet labeled S2-S5.

**Strips 9-10:** Round 2 strips 9-10 are placed wrong-side-up under the Sec. 1 Diamonds on the backside of both Foundation Sheets S1. These strips are not sewn until Round 3.

1. Pair Fabric S5, Strip #1, to Foundation Sheet S5, Sec 2.
2. Pair Fabric S5, Strip #2 to Foundation Sheet S5, Sec 2.
3. Pair Fabric S6, Strip #3 to Foundation Sheet S4, Sec 2.
4. Pair Fabric S6, Strip #4 to Foundation Sheet S4, Sec 2.
5. Pair Fabric S7, Strip #5 to Foundation Sheet S3, Sec 2.
6. Pair Fabric S7, Strip #6 to Foundation Sheet S3, Sec 2.
7. Pair Fabric S8, Strip #7 to Foundation Sheet S2, Sec 2.
8. Pair Fabric S8, Strip #8 to Foundation Sheet S2, Sec 2.
9. Pair Fabric S9 Strip #9 to Foundation Sheet S1, Sec 1.
10. Pair Fabric S9 Strip #10 to Foundation Sheet S1, Sec 1.

**Step 1:** Position Strip #1, Round 2 [Fabric S5] *right-side-up* on your table along the edge of **Foundation Sheet S5**. Lift the foundation paper and slide the strip under the **Section 2 Diamonds**. Line the raw edges along the trimmed sew-side.

**Step 2:** Repeat Step 1 for each of the **Foundation Sheets labeled S5, S4, S3, & S2.**

**NOTE - Glue Helps!** A small amount of glue added along the raw edges of each fabric strip will keep the edges secure as you feed the fabric between the presser foot and feed dogs when sewing on Line 1.

