


Step 2: Cut (4) pieces for each template. Mark and sew the (TRP) Lines on each fabric piece, then place the pieces into Bag #B3.

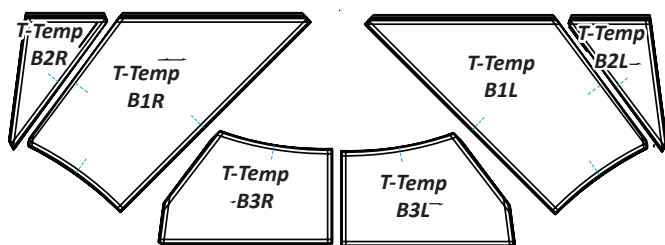


PREPARING THE STRIPS


Fabrics B2:a-B2:c

Step 1: The strips are now sorted and arranged into (2) different Color Groups.

► Color Group 1:

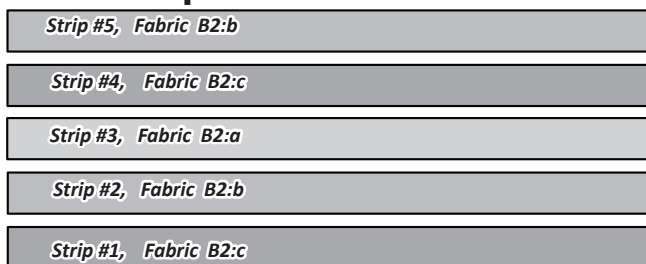


► Color Group 2:

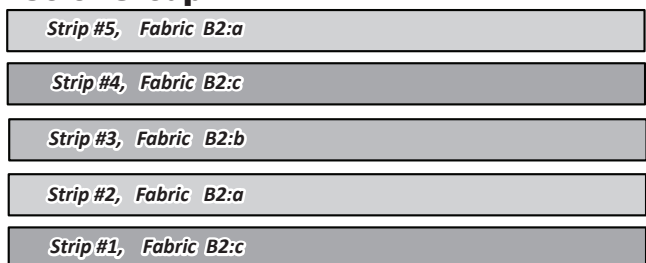


Step 2: Label and stack the strips in each group starting with Strip #5 on the bottom, ending with Strip #1 on the top.

Step 3: Cut each set of strips in half. The strips in Color Group #1 are placed with [Units B2R & B1L] in Bag #B1. The strips in Color Group #2 are placed with [Units B1R & B2L] in Bag #B2.

► Color Group 1:

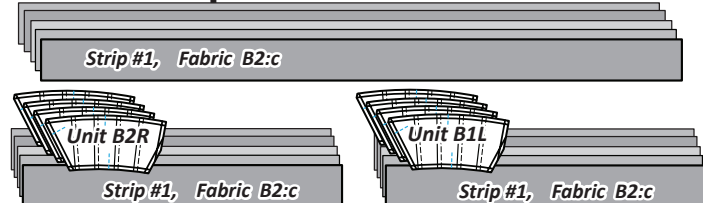


► Color Group 2:

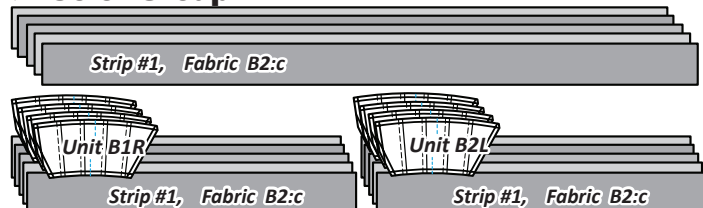


STRIP PIECING UNIT B1L & B2R: BAG #B1

NOTE - Tracing: All strips are stacked and sewn facing right-sides together.

Step 1: Position Strip #2 at your sewing table facing **right-side up**. Now Strip #1 is placed **wrong-side up** over the top of Strip #2.

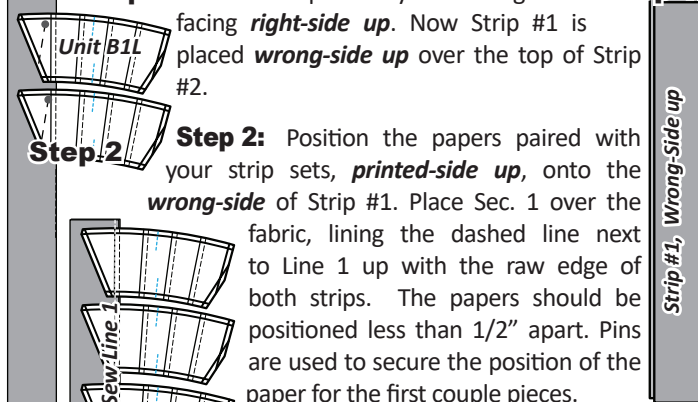


Step 2: Position the papers paired with your strip sets, **printed-side up**, onto the **wrong-side** of Strip #1. Place Sec. 1 over the fabric, lining the dashed line next to Line 1 up with the raw edge of both strips. The papers should be positioned less than 1/2" apart. Pins are used to secure the position of the paper for the first couple pieces.



NOTE - The extra space between the paper is needed so the papers can be pressed and cut apart after the papers have been sewn onto the fabric strips.

Step 3: The sewing begins on Line 1, stopping just before you get to the bottom of the second paper. Position the third paper onto the strips at your machine and sew on Line 1. Four (4) units are sewn on each strip.

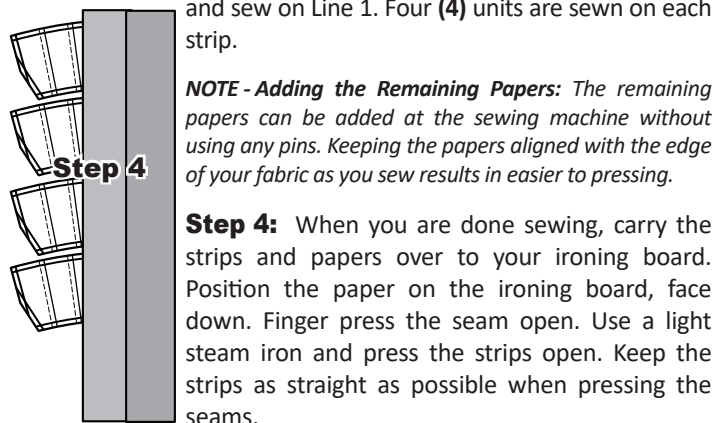

NOTE - Adding the Remaining Papers: The remaining papers can be added at the sewing machine without using any pins. Keeping the papers aligned with the edge of your fabric as you sew results in easier to pressing.


Step 4: When you are done sewing, carry the strips and papers over to your ironing board. Position the paper on the ironing board, face down. Finger press the seam open. Use a light steam iron and press the strips open. Keep the strips as straight as possible when pressing the seams.

Step 5: Carry the papers and strips back to your cutting board. Position the fabric on the board with the paper facing **right-side up**. Carefully cut between the foundation papers with your Rotary cutter to separate each unit. Stack the papers **paper-side up** once they are cut apart.

► Trimming Process

NOTE - Before you can sew the papers onto the next strip, fold back the papers and trim the next quarter inch seam allowance.

Step 6: With the paper-side up, place the fold template over Sec. 2, then line the edge up with Line 2 on the paper. Fold back the paper and trim the fabric with your **Add-A-Quarter** ruler.



Step 7: Stack the units, leaving the papers in the folded back position to prepare for the next sewing round.