



Foundation Papers: Cut out (4) ea. Unit D1 thru Unit D12 [NP 962, 963], place in assigned Bag #s listed above. T-Templates D1-D8, place in Bag #D5. The Templates and Template Layout Sheet (TLS) are place into the D-Template Bag.


Newsprint graphics have been provide to help you identify the Unit #s and Templates referenced in your cutting instructions. The cutting instructions not only provide you with the required cutting information needed to cut out your pieces, they also provide you with the information you need to keep your Fabric, Templates, and Foundation Units organized, and sorted into their associated Bag #s. *Refer back to Introduction section for additional instructions on how to prepare your foundation papers and templates.

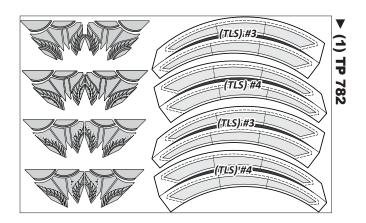


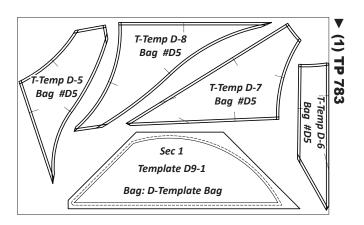


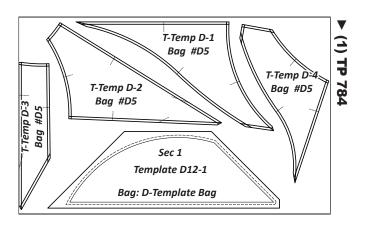





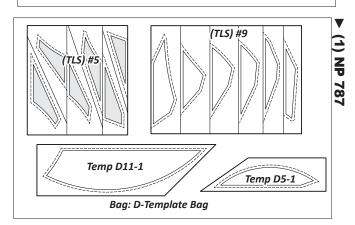

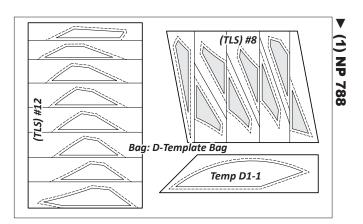

▶ Fabric Information:

The Unit Chart to the left includes yardage, fabric numbers, and reference to which fabrics go with the Templates and (TLS) to complete *Units D1-D12* and *T-Templates D1-D8*. The color layout below, provides a visual reference to the assigned Fabric #s for each unit.

(4) ea. Units D1-D12 & T-Temp D1-D8,		
GROUP-D FABRIC#	YDS INCH	ASSIGNED COLORS
<u>Fabric D1</u> Unit D4 & D5, Temp D4-1 & D5-1	<u>1/4 yd</u> or (7")	Fabric Swatch
<u>Fabric D2</u> Unit D1 & D8, Temp D1-1 & D8-1	<u>1/2 yd</u> or (16")	Fabric Swatch
<u>Fabric D3</u> Unit D4 & D5, (TLS) #1, #2	<u>3/8 yd</u> or (11")	Fabric Swatch
<u>Fabric D4</u> Unit D1 & D8, (TLS) #3, #4	<u>3/8 yd</u> or (13-1/2")	Fabric Swatch
<u>Fabric D5</u> Units D3 & D6, (TLS) #9, #10	<u>1-3/8 yd</u> or (46")	Fabric Swatch
<u>Fabric D6</u> Units D2 & D7, (TLS) #11, #12	<u>1-3/8 yd</u> or (48")	Fabric Swatch
<u>Fabric D7</u> Units D3 & D6, (TLS) #5, #6	<u>3/4 yd</u> or (23")	Fabric Swatch
<u>Fabric D8</u> Units D2 & D7, (TLS) #7, #8	<u>1-3/8 yds</u> or (48")	Fabric Swatch
<u>Fabric D9</u> T-Temp D-1 thru D-8	2-1/2 yds or (90")	Fabric Swatch
<u>Fabric D10</u> Units D10, D11, (TLS) #13, #14	<u>1/2 yd</u> or (18")	Fabric Swatch
<u>Fabric D11</u> Units D9, D12, (TLS)#15,#16	<u>1/2 yd</u> or (18")	Fabric Swatch
<u>Fabric D12</u> Units D10, D11, Temp D10-1 & D11-1	<u>5/8 yd</u> or (22")	Fabric Swatch
<u>Fabric D13</u> Units D9, D12, Temp D9-1 & D12-1	<u>1 yd</u> or (33")	Fabric Swatch


NOTE - Stacking Strips: Templates and (TLS) are repositioned on the strips to achieve the number of cuts required in the cutting Instructions. Please read carefully to ensure the correct # of pieces are stacked beneath each Template or (TLS) before cutting.

NOTE - Glue: Repositionable glue placed on the backside of each template will keep the templates and (TLS) from moving in the cutting process.

► Fabric D1: Temp D4-1 & D5-1

Step 1: Cut **(2)** 3-1/2" by 42" strips from *Fabric D1*. The strips are stacked facing *right-side up* into one stack.

Step 2: *Unit D4, Temp D4-1* and *Unit D5, Temp D5-1* are used to cut (4) pieces matching the size of each template. Reposition the templates for each additional cut.



Step 3: Clip the templates to the fabric beneath and place in Bag #D1 with their respective foundation unit.



► Fabric D2: Temp D1-1 & D8-1

Step 1: Cut **(4)** 4" by 42" strips from *Fabric D2*. The strips are stacked facing *right-side up* into one stack.


Step 2: *Unit D8, Sec 1 Temp D8-1* and *Unit D1, Temp D1-1* are used to cut **(4)** pieces matching the size of each template.




Step 3: Clip the templates to the fabric beneath and place in Bag #D1 with their respective foundation unit.



▶ Fabric Color Layout

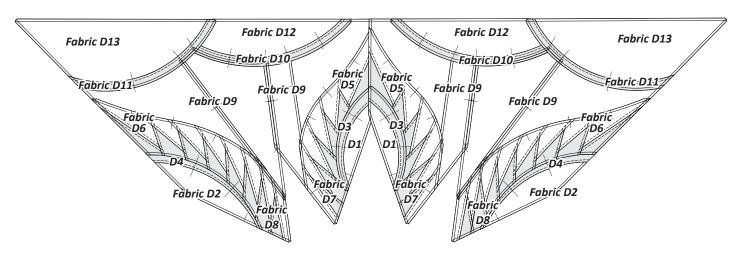


Step 4: The template pieces are placed back into Bag #D5.

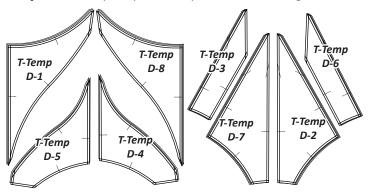


► Fabric D10: (TLS) #13 & #14

Step 1: Cut (1) 18" by 42" strip from *Fabric D10*. Position the strip facing *right-side up* as shown. A small amount of repositionable fabric glue is placed on the backside of each *Unit D11 (TLS) #14, and Unit D10 (TLS) #13*. The backside of each layout sheet is then placed against the right-side of the fabric. Position (2) each *(TLS) #14 & #13* onto the strip.




Step 2: Cut around each layout sheet leaving about 3/8" of excess fabric along each edge. Set your stitch length and sew the (TRP) Lines. After the (TRP) Lines are sewn, trim the threads and excess fabric off around the perimeter of each layout sheet. Cut the individual template sections apart on *Cut Line 1 & 2*. Place both *Sec Temp D11-2* and *D10-2* in Bag #D4.




► Fabric D11: (TLS) #15 & #16

Step 1: Cut **(1)** 18" by 42" strip from Fabric D11. Position each strip facing *right-side up* as shown. A small amount of repositionable fabric glue is placed on the backside of each *Unit D9 (TLS) #15*, and *Unit D12 (TLS) #16*. The backside of each layout sheet is then placed against the right-side of the fabric. Position **(2)** each *(TLS) #15 & #16* onto the strip.



Step 2: Cut around each layout sheet leaving about 3/8" of excess fabric along each edge. Set your stitch length and sew the (TRP) Lines. After the (TRP) Lines are sewn, trim the threads and excess fabric off around the perimeter of each layout sheet. Cut the individual template sections apart on *Cut Line 1 & 2*. Place both *Sec Temp D12-2* and *D9-2* in Bag #D4.




► Fabric D12 Temps D10-1 & D11-1

Step 1: Cut **(4)** 5-1/2" by 42" strips from *Fabric D12*. The strips are stacked facing *right-side up* into one stack. *Unit D11, Sec 1 Temp D11-1* & *Unit D10, Sec 1 Temp D10-1* are used to cut **(4)** pieces matching the size of each template.




Step 2: Clip the templates to the fabric beneath and place with their respective foundation Units in Bag #D4.




► Fabric D13 Temp D9-1 & D12-1

Step 1: Cut **(4)** 8-1/4" by 42" strips from *Fabric D13*. The strips are stacked facing *right-side up* into one stack. *Unit D9, Sec Temp D9-1* & *Unit D12, Sec Temp D12-1* are used to cut **(4)** pieces matching the size of each template.



Step 2: Clip the templates to the fabric beneath and place with their respective foundation Units in Bag #D4.

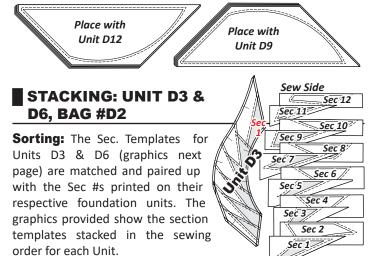

Sew Side Sec 8 Sec 6 Sec 5 Sec 4 Sec 2

Step 2

Step 5

Step 4


Fold Template

Stacking: The stacking process begins with the largest Sec. # on the bottom of each stack. The pieces are stacked in reverse order finishing with Sec. 1 on top. The paper piecing instructions are written using the graphics for Unit D3. Please note: section 1 on Unit D6 is not the same as Section 1 on Unit D3. Sections 1 and 2 were switched for Unit D6 to allow for opposing seams when you assemble.

FOUNDATION PIECING: UNIT D3

NOTE - Tracing the Dashed Lines: Place the foundation paper onto a light table. Flip the foundation paper over and trace the dashed lines printed on the front-side of the foundation paper, onto the backside of the paper.

Step 1: The first piece of fabric is placed wrong-side up on your table. Lift the foundation paper, slide the fabric under Sec. 1 and glue to the backside of the paper. Repeat Step 1 for each foundation paper.



Step 1

Step 2: Line the edge of the Fold Template up with Line 1. Then fold the paper back over the top of the fold template.

Step 3: Trim the fabric with your Add-A-Quarter ruler.

Step 4: Place the fabric piece for Sec. 2, right-side up next to the folded back paper.

Step 5: Lift the paper, and slide the fabric under Sec. 2, lining the sew-side up with the trimmed seam allowance. Repeat Steps 2-5 for each foundation paper before moving onto Step 6.


Step 6: Open the paper and sew on Line 1. The stitches should start and stop about 1/8" past

Step 7

Press

the beginning and the end of each stitch line. Complete the sewing on each unit before moving onto the next step.

Step 7: Loosen the glue under Sec. 1, then press the fabric pieces open on the backside of each paper.



2): Folded

Back Paper

the stitches on Line 1. Stop tearing when you hit the fold template.

3): Trim the fabric with the Add-A-Quarter ruler. Position the third fabric piece right-side up next to the paper.

1): Position

Fold Temp


plo

Template

3): Trim

Add-A-Quarter

4): Lift the paper and slide the fabric under Sec. 3. 5): Open the paper, sew on




Continue adding the remaining fabric pieces to each section to complete the paper piecing.

Registration Lines (TRP): Sew the (TRP) lines using your preferred Basting Stitch length.

Trimming Unit D3: The trimming is completed on the exterior line after the TRP Lines are sewn. The foundation paper is not removed until you are ready to assemble the Block Groups for your border. Place the Unit D3 pieces back into Bag #D2.

Unit D6: The paper piecing steps are mostly the same for Unit D6. There are only a few thing to watch for. First the Units are a mirror image so the graphics will look backwards as you follow the steps. Second pay attention to the location of Sec 1 and Sec 2 on the foundation papers. The sewing order for Section 1 and 2 were switched to change the pressing directions on the first sew line. This is done to provided you with opposing seams when joining the points in the assembly process.



UNITS D2, & D7, BAG #D3

The stacking and paper piecing process is the same for Unit D2 & D7. Please reference the previous stacking and paper piecing steps

to get you started. After the piecing is completed, sew the (TRP) lines and trim the excess fabric Unito around the perimeter of each foundation unit. Then place the foundation units back into their assigned bags. Do not removed the foundation paper.