



► (1) TP 95

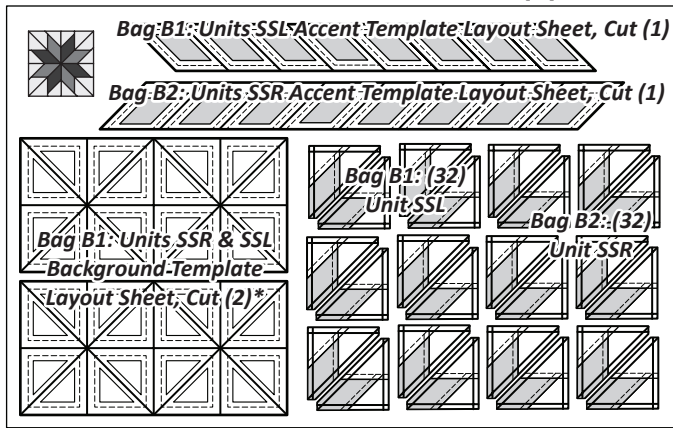

NOTE - Unit SSR & SSL Background TLS: In the first printing of this TLS, we realized that we did not add the Sew Sides correctly to all of the Templates. In the stacking instructions, you will see a note to simply ignore the Sew Sides and position the Template stack as demonstrated in the graphics. We will correct the labels in later printings.

► **Small Star Fabric Information:**

The table below includes yardage, fabric references, and which fabrics should go with which cutting templates to complete Group B. This table is your guide for keeping you organized. Don't forget to cut a swatch of your chosen fabric to paste in the box in the Assigned Colors column! Reference the Color Layout below for where each fabric goes.



► **Group B: Color Layout (Front-side)**


Fabric B1

Group B: Units SSL & SSR, Make (32) each		
GROUP-B FABRIC #	YARDAGE INCH	ASSIGNED COLOR
Fabric B1 Unit SSR & SSL TLS	5/8 yd or 21"	FABRIC SWATCH
Fabric B2 Unit SSR Accent TLS	3/8 yd or 10"	FABRIC SWATCH
Fabric B3 Unit SSL Accent TLS	3/8 yd or 10"	FABRIC SWATCH


■ **UNIT SSL AND SSR CUTTING INSTRUCTIONS, BAGS #B1 & B2**

► **Fabric B1**


Step 1: From Fabric B1, cut (3) 7" x 42" strips. Stack the strips *right-side-up* into (1) stack.



Step 2: The *Unit SSR & SSL Background TLS* is used to sub-cut (8) rectangles the size of the Template Layout Sheet from the (3) strips. You will have (1) rectangle left over.



Step 3: Re-stack the fabric pieces into (1) stack of (8). Then, place the TLS on top and slice through the cut lines, in numerical order to cut the pieces apart. Clip each stack together and place half of the Templates into Bag #B1 and half the Templates into Bag #B2.

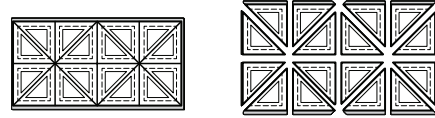

► **Fabric B2**

Step 1: From Fabric B2, cut (4) 2-1/2" x 42" strips. Stack the strips *right-side-up* on your cutting table.



Step 2: The *Unit SSR Accent TLS* is used to sub-cut (4) parallelograms the size of the TLS from each strip.



Step 3: Place the TLS on top and slice through the cut lines, in numerical order to cut the pieces apart. Clip each stack together and place the pieces into the Bag #B2.



► **Fabric B3**

Step 1: From Fabric B3, cut (4) 2-1/2" x 42" strips. Stack the strips *right-side-up* on your cutting table.



Step 2: The *Unit SSL Accent TLS* is used to sub-cut (4) parallelograms the size of the TLS from each strip.



Step 3: Place the TLS on top and slice through the cut lines, in numerical order to cut the pieces apart. Clip each stack together and place the pieces into the Bag #B1.



■ **SORTING AND STACKING UNIT SSL AND SSR: BAGS #B1 AND #B2**

Sort the pieces in Bag #B1 on your table with the templates and fabric pieces facing *right-side-up*. You will have (1) accent piece and (2) background pieces. The stacking begins with the Template for Sec. 3 on the bottom. The sew sides are aligned at the top. The pieces are then stacked in reverse order, finishing with Template for Sec. 1 on top. Sec. 1 does not have a Sew Side.

NOTE - SEW SIDES: The first printing of the pattern has the Sew Sides on

