


► **Illustration 1, Quilt Block Layout:**

Illustration 1: Arrange the 16-1/2" blocks (finish size is 16"), and T-Templates on a design wall as shown to the left. All blocks and T-Templates are placed on your design wall facing right-side-up.


► **Illustration 2, Assembly Instructions**

Illustration 2: Assemble the following pieces (Graphic is included on Page 20).

- **Corner Units:** (2) each T-Template B6 are sewn on to (1) T-Template B4. A mitered seam is required to complete the Corner Block Groups. Make (4). Press the seams to the direction the arrows are pointing as shown on the front side of the quilt layout. [Which would be, counter-clockwise on the backside of each block groups.
- **Edge Units:** T-Template B5 is joined with T-Template B3. Make (8). Press all seams towards T-Temp B5.

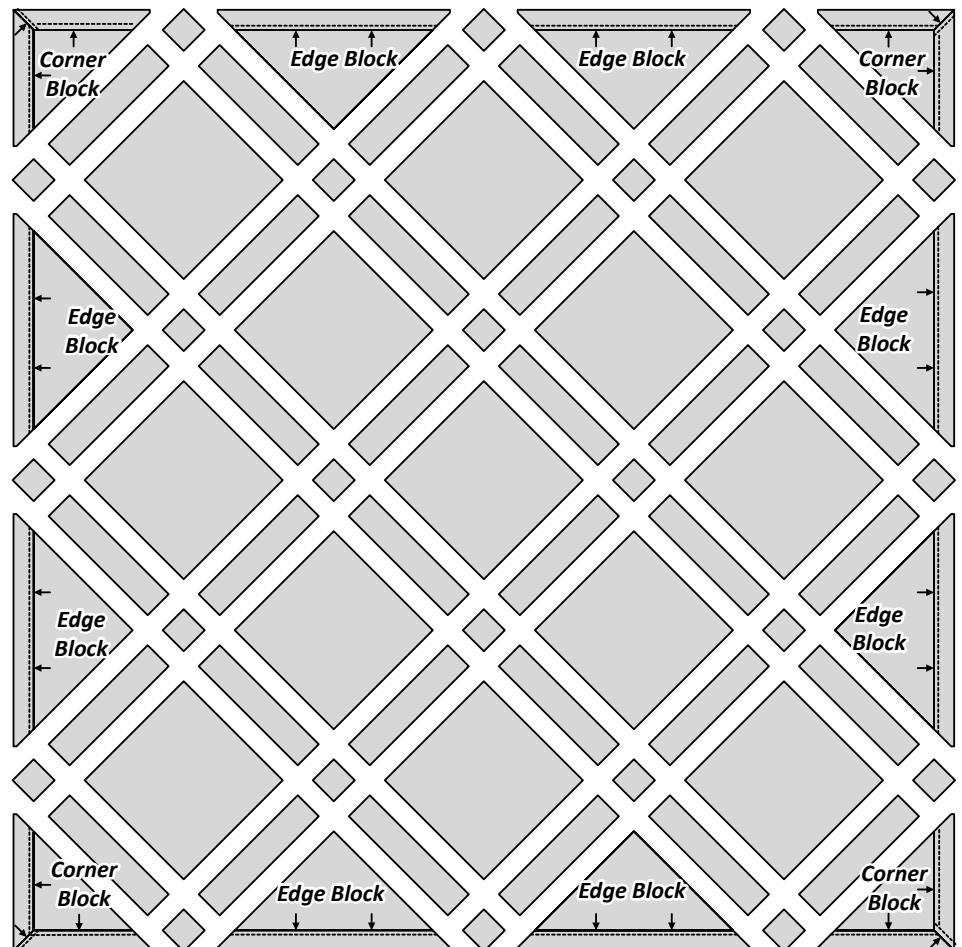

► **Illustration 3**

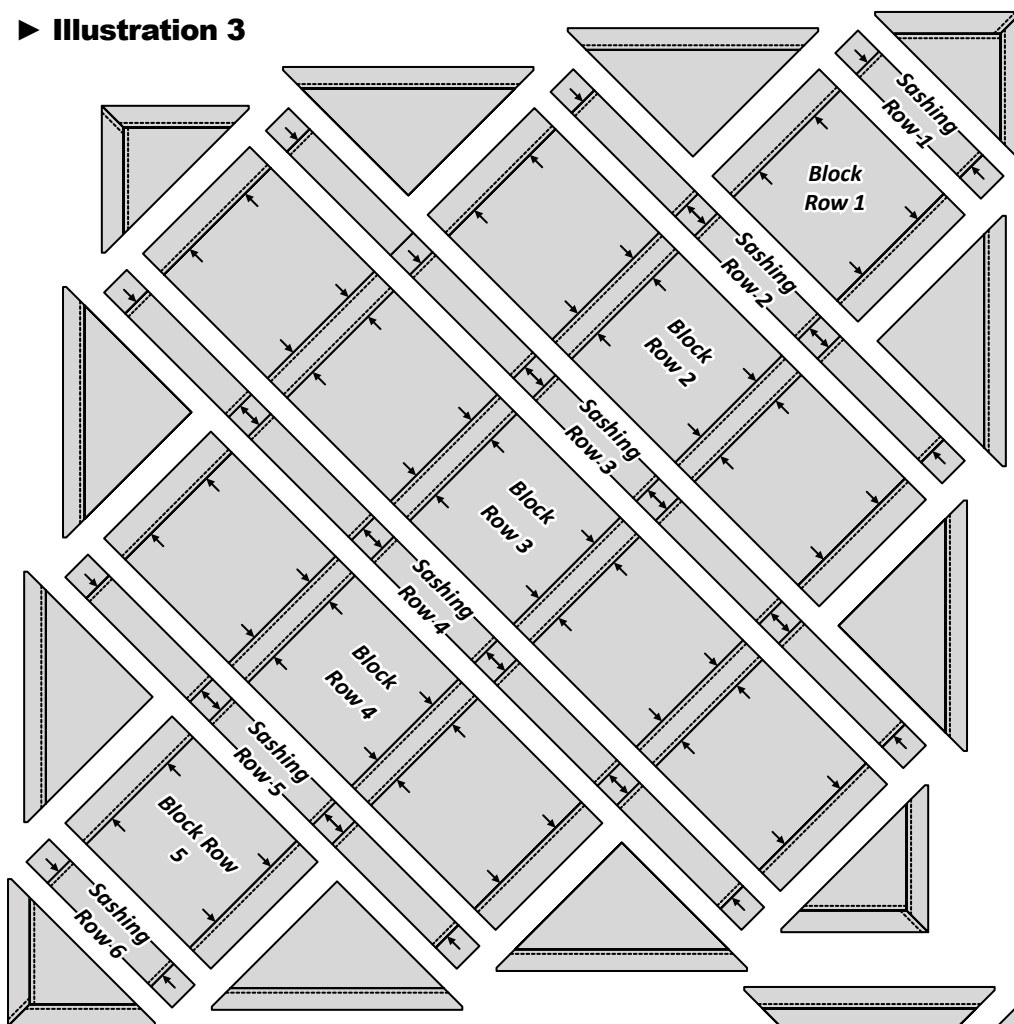

► **Illustration 3, Assembly Instructions**

NOTE - Pressing: It is our recommendation that you press all the seams towards the sashing (T-Temp B1). Including the seams for the corner stone (T-Temp B2).

- **Block Rows 1-5, Assembly:** The 16-1/2" blocks are joined with the sashing strips (T-Temp B1) to complete (5) rows. Seams are pressed in towards the sashing.
- **Sashing Rows 1-6, Assembly:** The corner Stones (T-Temp B2) are joined with the sashing strips to complete (6) rows. Seams are pressed out towards the sashing.


► **Illustration 4, Assembly Instructions**

Illustration 4: Join the Block Rows and Sashing Rows as shown in the Illustration to the right. Seams are pressed towards the Sashing Rows. Where sashing strips are joined with the corner stones, you may have some stacked seams. However, most intersections will have seams going in the opposite directions. As you complete the quilt (through Illustration 6), take the time to pick back a few seams at the opposing intersections and tweak them open to the quilt lies as flat as possible.

- Sashing Row 1 is sewn to Block Row 1.
- Sashing Row 2 is sewn to Block Row 2.
- Sashing Rows 3 and 4 are sewn to Block Row 3.
- Sashing Row 5 is sewn to Block Row 4.
- Sashing Row 6 is sewn to Block Row 5.

NOTE - Glue is Your Friend: Gluing the raw edges before you sew your seams helps feed the fabric evenly between the presser foot and feed dog.

► **Illustration 4**

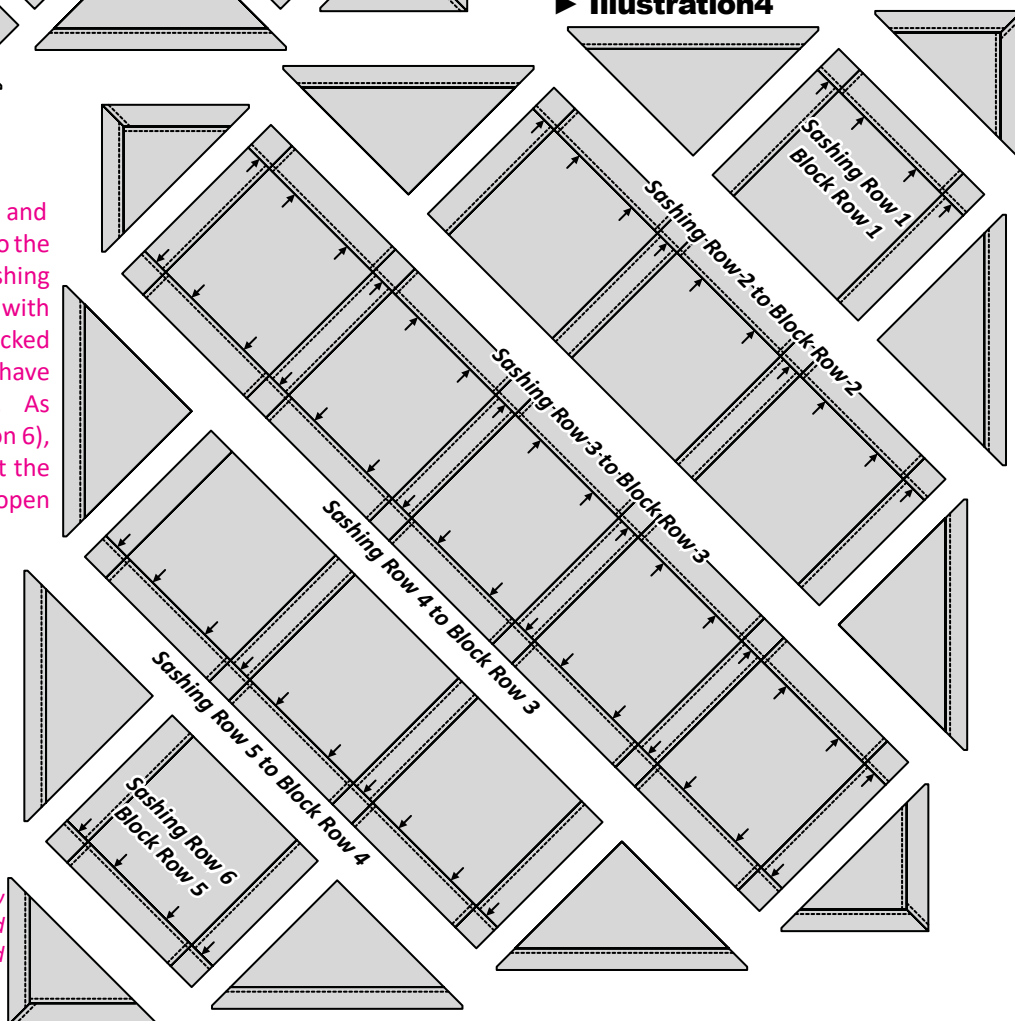


► **Illustration 5, Assembly Instructions**


Corner & Edge Blocks: Rows 1-5 are now joined with the Corner and Edge Blocks. Press all seams in towards the sashing (T-Template B1).

- One Edge Block is sewn on to both ends of each Row 1, 2, 4, and 5.
- One Corner Block is sewn onto each end of each Row 3.

► **Illustration 5**

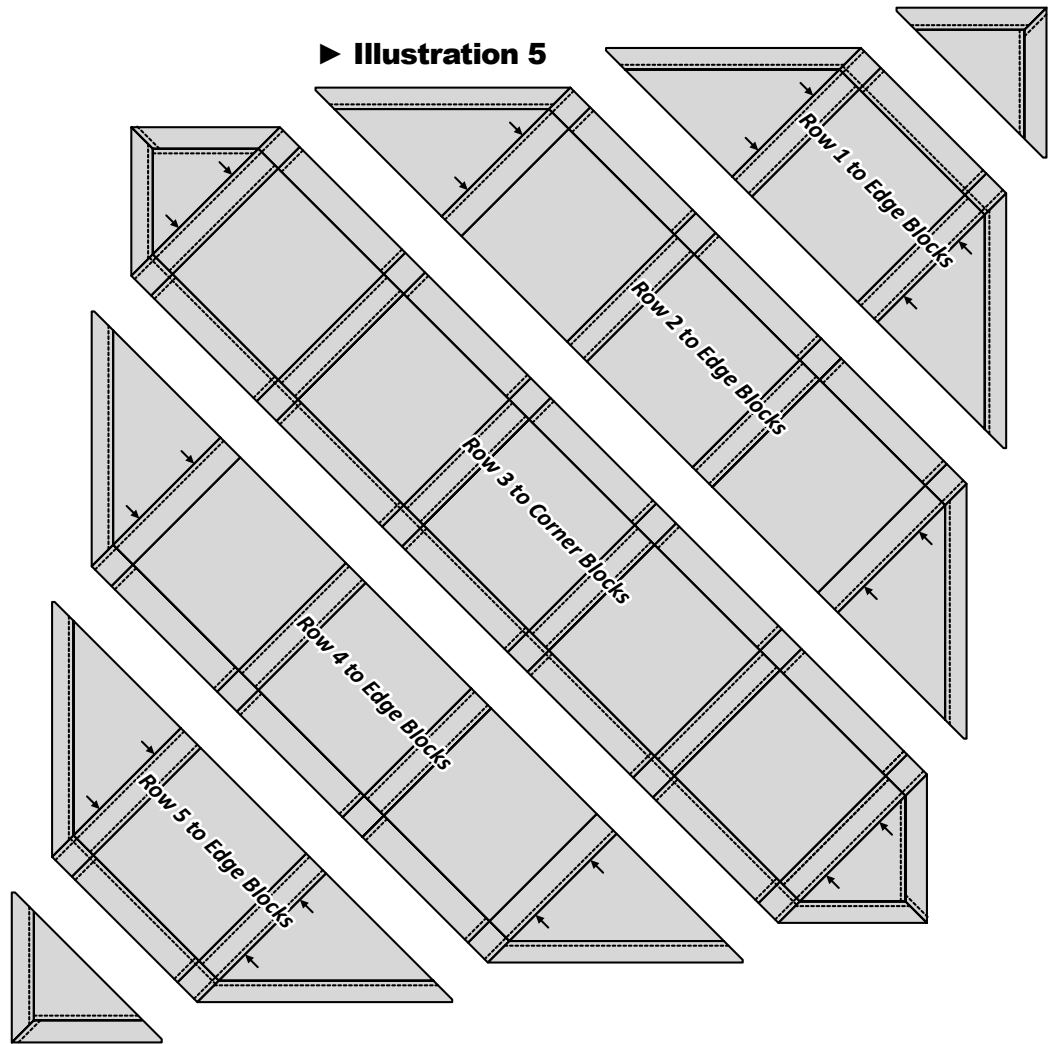

► **Illustration 6**

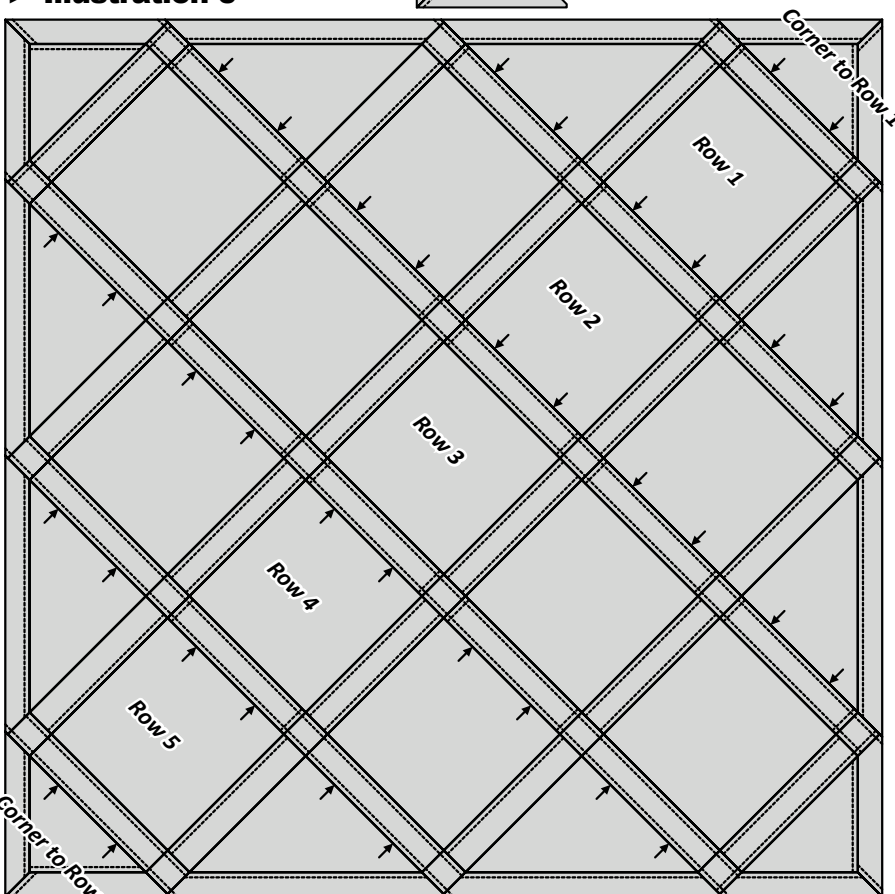

► **Illustration 6, Assembly Instructions**

Illustration 6: The diagonal rows 1-5 are joined to complete the quilt. Press all seams in, towards the sashing (T-Template B1).

- Corner Blocks are joined with Rows 1 and 5 to complete two Corner Groups.
- Corner Group 1 is joined with Row 2.
- Row 2 is joined with Row 3.
- Row 3 is joined with Row 4.
- Row 4 is joined with Corner Group 5.