ASSEMBLE THE BORDER UNITS

▶ Illustration 1

Arrange the Foundation Units and T-Templates onto your design wall as shown. Remove all the foundation papers from the backside of each Unit. Make sure you don't get your Units or T-Templates mixed up. If you mix them up none of the (TRP) lines will match up. Before you begin to sew these units together, make sure your stitch length is set back to normal for paper-piecing and that you have set your machine to sew a 1/4" seam.

▶ Illustration 2

Step 1: Join Unit D1 to *T-Template D7*. The seam is pressed towards Template D7.

Step 2: Join Unit D2 to *T-Template D8*. The seam is pressed towards Template D8.

Step 3: Join Unit D3 to *T-Template D9*. The seam is pressed towards Template D10.

Step 4: Join Unit D4 to *T-Template D10*. The seam is pressed towards Template D11.

Step 5: Join Unit D5 to *T-Template D11*. The seam is pressed towards Template D9.

Step 6: Join Unit D6 to *T-Template D12*. The seam is pressed towards Template D8.

Step 7: Join *T-Template D1* to *T-Template D2*. The seam is pressed towards *T-Template D2*.

► Illustration 3

Step 8: Match and pin the (TRP) lines before you sew. Join the pieces as shown in Illustration 3 to complete Group 1 and 2.

Step 9: The Illustrations show the pressing from the front side. The diagonal seams are pressed Counter Clockwise on the back showing clockwise on the front.

▶ Illustration 4


Step 10: Join the **(3)** groups as shown to complete the Corner Units.

Step 11: The last two seams on each corner are pressed towards the center. As shown with the arrows.

Refer back to the Introduction Booklet for additional steps to complete final assembly of your quilt.

6 Published by quiltworx.com

► Illustration 1

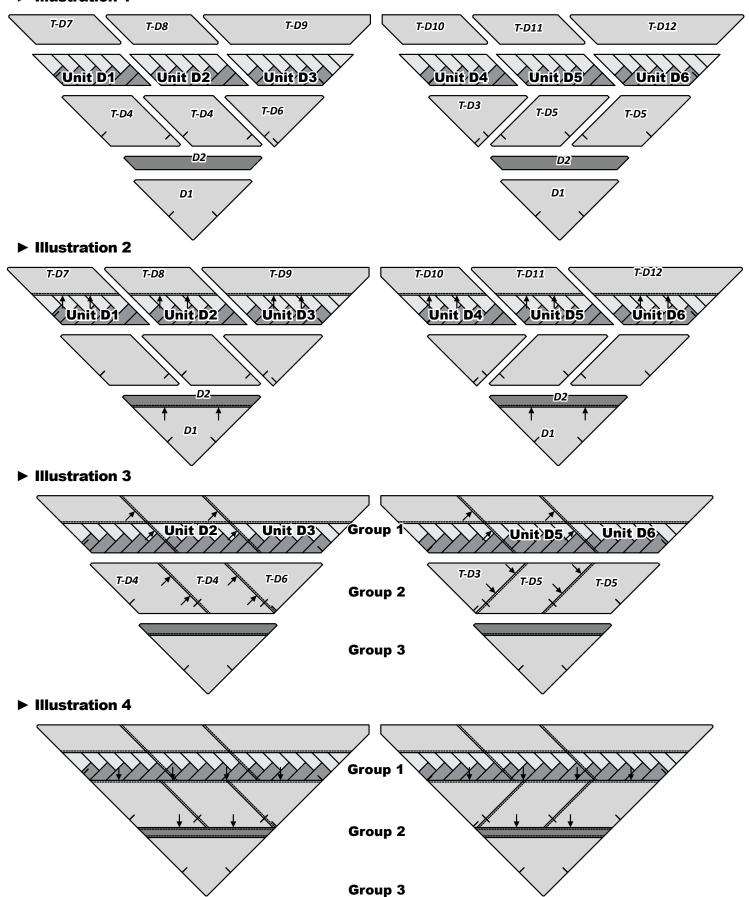

© Copyright August 2017 7