

ADDITIONAL INFORMATION

Basting the Border Units: I normally sew a securing stitch along the outside edges on all my pieced border units. I do this to keep the stitches from pulling out along the edges of the pieced quilt blocks. It also reduces the chance of stretching the fabric along the edges as you work with piecing your quilt. The basting line along the edge can also be used to set the boundary for machine quilting. If we are working with a digitized quilting designs that fit within a boundary, the basting line can be used as the boundary line. I normally use the quarter inch line along the edge of the paper as my basting stitch line.

Foundation Papers: You will need to remove the foundation papers before you begin sewing the units together. If you are unfamiliar with the process for removing the paper, refer back to the [Introduction Booklet under Removing the Foundation Paper on Page 6.](#)


Curved Piecing: Basic curved piecing graphics are not included with the assembly instructions in each booklet. If you are new to curved piecing and need help getting started, reference the curved piecing instructions on Page 11, of the Introduction Booklet. Detailed step by step instructions are provided to teach you the basic steps for completing a curved seam.

Pressing: We have included pressing arrows on all the assembly graphics at the end of each booklet. The pressing arrows are also included on the assembly graphics printed on LP 34-36. These newsprint pages were packaged In Booklet One. Most of the seams in this quilt are joined with what I refer to as a stacked seam. However there are a few seams that are joined as opposing seams.

ASSEMBLING THE BORDER BLOCK GROUPS

Step 5: The T-Templates are joined with Units H1L & H1R to complete the Border Block Groups. [*Group H1L & Group H1R*].


- Join Unit H1L with T-Temp H2L. Press towards T-Temp H2L.
- Join T-Temp H2L with T-Temp H1L. Press towards T-Temp H1L.
- Join Unit H1R with T-Temp H2R. Press towards T-Temp H2R.
- Join T-Temp H2R with T-Temp H1R. Press towards T-Temp H1R.

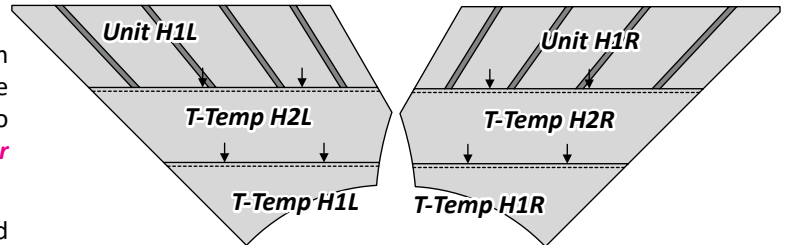


Sewing Directions: Position the pieces right sides together, match the smart corners at both ends, then glue the raw edge with your fabric glue pin along the sew edge. Note: Gluing the raw edges before you sew allows the feed dogs to feed both fabric evenly as you sew. When you are done sewing press the seams toward the T-Templates referenced above.

Step 6: Join the T-Templates with Units H2L and H2R to complete the Border Block Groups. [*Group H2L & Group H2R*].

- Join Unit H2L with T-Temp H3L. Press Towards T-Temp H3L.
- Join Unit H2R with T-Temp H3R. Press Towards T-Temp H3R.

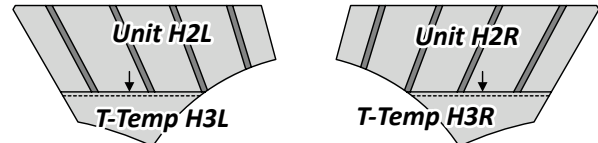

Step 7: No additional sewing is required for the Border Block Groups *H3L & H3R*.

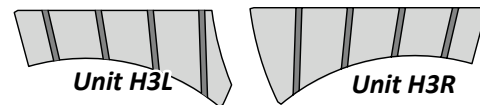

► Assembly Graphic Labels

