



Step 3: Add the Sashing Strips as shown and press the seams towards the sashing strips.

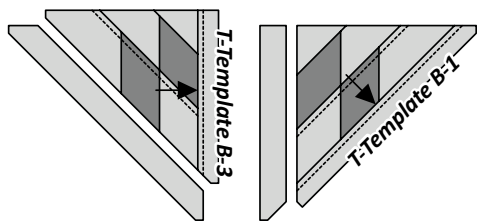


Step 4: Add the final sashing strips, pressing the seams towards the sashing strips. This group of blocks is now ready for final assembly. Place in Bag B until you are ready to assemble.

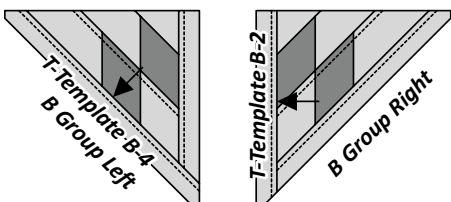


► **Assembly of the Units B3R & B4R, B3L & B4L, T-TLS 4 Sashing Strips, and Units CR and CL and T-Templates CL and CR**


Step 1: Remove the foundation papers from Units B3R, B3L, B4R and B4L, and Unit CR and CL. Position the pieces right-side-up next to the T-TLS Sashing Strips as shown in the graphic below.

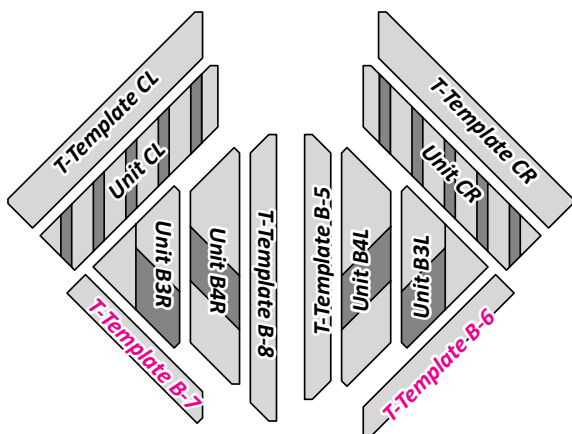


Step 2: Set your machine to sew a 1/4" seam. Then, sew Units B3R and B4R together and B3L and B4L together. You will sew (2) sets of each. Press the seams towards the B4 Units.

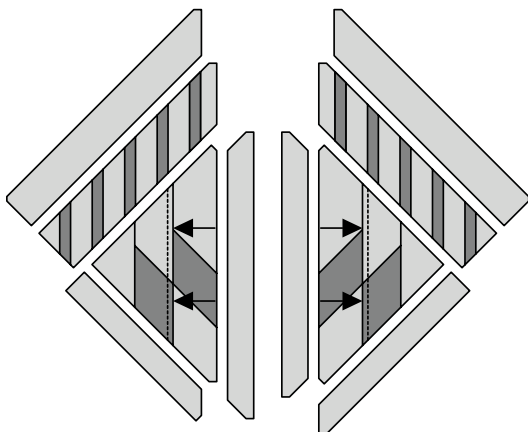


Step 3: Add the Sashing Strips as shown and press the seams towards the sashing strips.

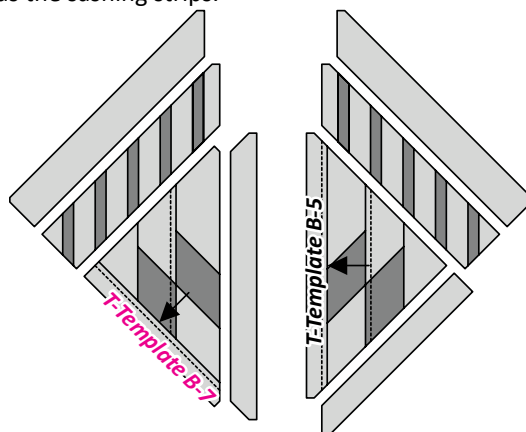


Step 4: Add the final sashing strips, pressing the seams towards the B Units. This group of blocks is now ready for final assembly.

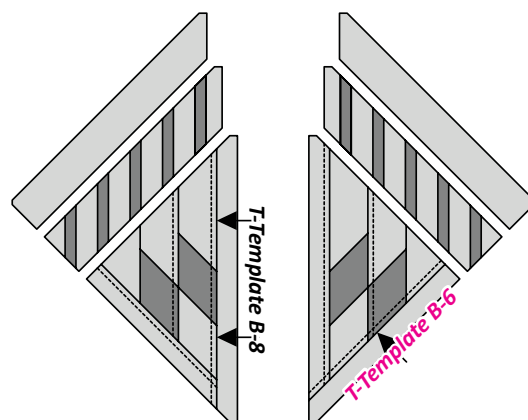


Step 5: Sew Units CL and CR to the B Groups and press the seams towards Units CL and CR.

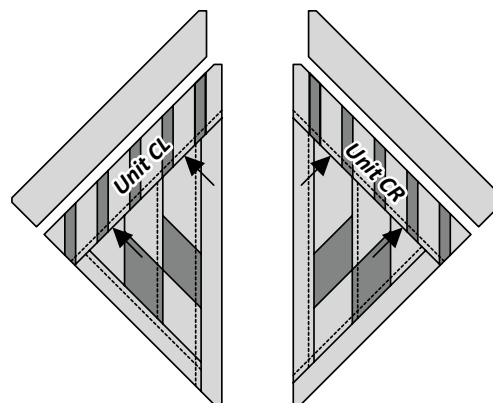


Step 6: Sew T-Templates CL and CR to the B/C Group. Press the seams toward T-Temp CL and CR. When finished, you'll have (2) Right and Left groups. This group of blocks is now ready for final assembly. If you are not ready to assemble, place back into Bag C.

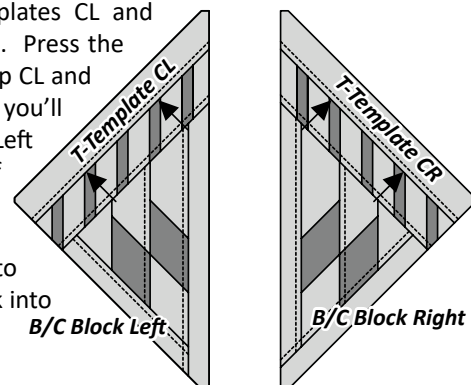


► **Illustration 1**

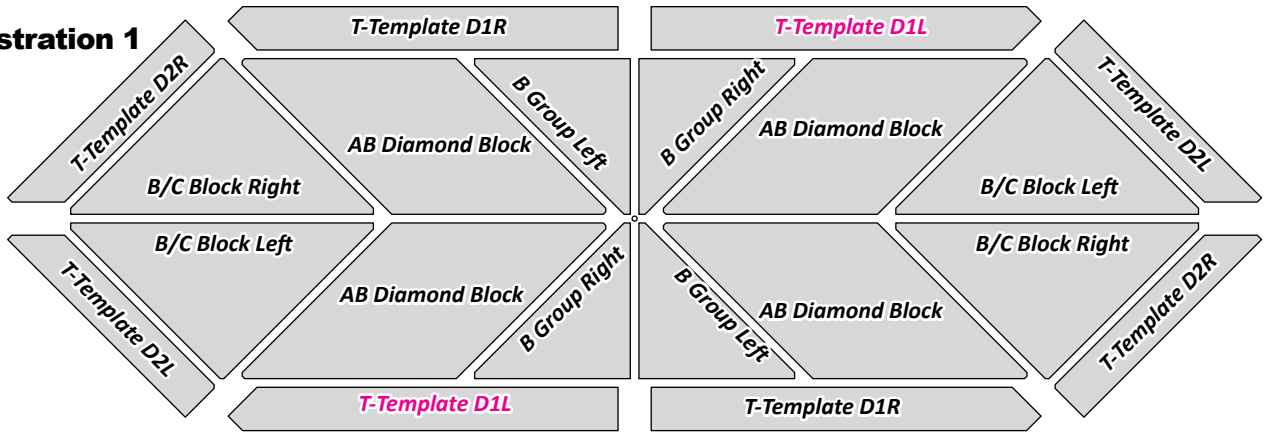

► **Illustration 2**

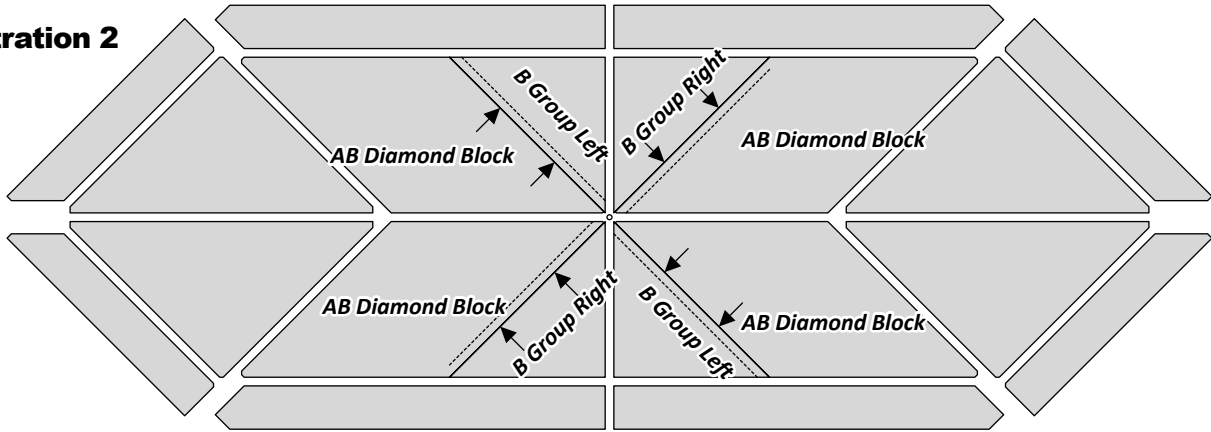

► **Illustration 3**

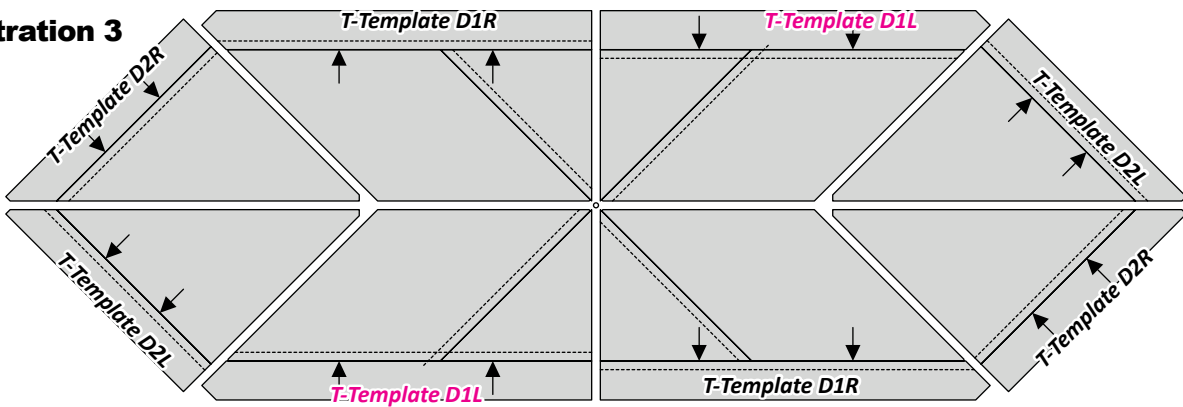

► **Illustration 4**

