


ASSEMBLE THE DIAMONDS

Step 1: The rows are joined now to complete the diamonds for each Color Group in Bags AB-1, and AB-2 into the order they will be sewn together. One, each, of Rows 1, 2, 3, & 4 are joined to complete **(16)** diamonds.

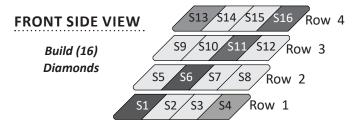


Step 2: Position Row-2 onto the top of Row-1, with both strips facing right-sides-together. Row-1 is placed on the bottom and Row-2 on the top. Match and pin each intersection where the sew lines cross on your foundation paper. Once the pieces are pinned together, remove the foundation papers from under the diamond sections on Row-1 without disturbing the pins.


RIGHT SIDES TOGETHER Row 1

Step 3: Place Row-1 on the S13 S14 S15 S16 Row bottom next to the feed dogs, leaving Row-2 on top, when sewing the strips together. Press the seams towards Row-1. S1 S2 S3 S4 Row 1

Step 4: Position Row-3 on top of Row-2, with right-sides-together. Pin at each cross-section, then remove the paper under Row 2.

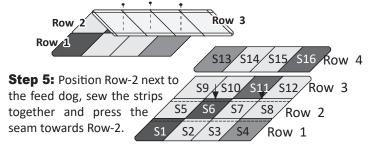

Step 6: Position Row-4 onto Row-3, right-sides-together. Pin at each cross-section, then remove the papers under Row-3. Sew the strips together with Row-3 next to the feed dogs.




CUTTING: BAG #AB-1 AND AB-2: SASHING

► Fabric AB-A1

Step 1: Cutting instructions were provided in the Unit Chart on Page 11 for the sashing. You should have **(6)** 5" by 42" strips in each Bag #AB-1 and #AB-2. If you have not cut these strips yet, please do so at this time.

Cut (12) 5" by 42" Strips, Fabric AB-A1

Step 2: Stack the strips in EACH Bag facing *right-side-up* into (2) stacks and subcut (32) 5" by 14" rectangles. Stack the rectangles into (4) stacks of (8) pieces.



Step 3: Remove both T-TLS AB-1B to AB-4B from Bag #AB-1 and T-TLS AB-1C to AB-4C from Bag #AB-2. Eight **(8)** fabric pieces are stacked under each *T-Template Layout Sheet* as shown below (and at the top of the next column). You will have **(2)** stacks for each T-Template. Trim the excess fabric around the perimeter of each T-TLS to ensure the proper width. Large paper clips are used to secure the T-TLS to your fabric before you cut. Use your rotary cutter to separate the templates on Cut Lines 1 through 3. Trim the shaded area of the paper and excess fabric away along both ends to complete the cutting for the length. Then, trim the smart corners. Accurate trimming is necessary to preserve the Smart Corners. Place the pieces with each T-Template into the Bags as noted below.

